

# TX-H1936SW17A-2860V39-02H90

## PRODUCT SPECIFICATION

**Features:**

- ↵ Excellent transiting heat from LED chip operating under 1200mA.
- ↵ Provide uniform cross distribution of positive white and warm white dual color scheme, mixed pure.
- ↵ High luminous output.
- ↵ No UV.
- ↵ Encapsulated materials are environmentally certified and meet environmental requirements.

**Chip Material:**

↵ GaInN

**Emitting Color:**


↵ White  
 ↵ Warm white

**Applications:**

↵ Commercial lighting  
 ↵ General Lighting

Part No.	TX-H1936SW17A-2860V39-02H90	Spec No.	WKF-BF0378	Page	1 of 10
----------	-----------------------------	----------	------------	------	---------

**Package Dimensions:**

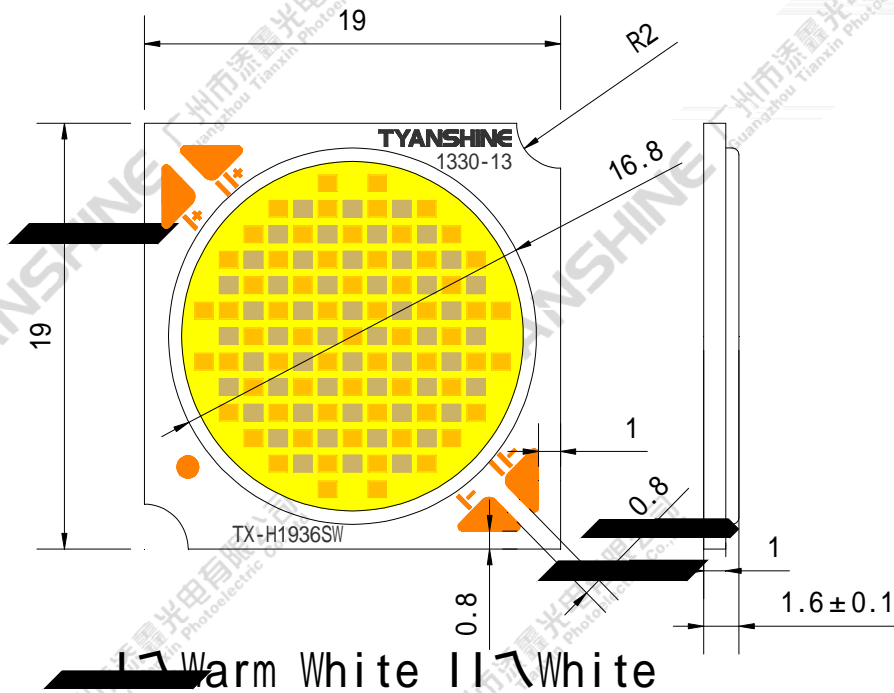

**Notes:**

- 1. All dimensions are in millimeters .
- 2. Tolerances unless otherwise mentioned are ±0.25mm .

**Code Formats:**

TX-00 0 0 BT /TT2 1 Tf 14.04329 74.85826 331.31149 cm 1.0

Part No.	TX-H1936SW17A-2860V39-02H90	Spec No.	WKF-BF0378	Page	2 of 10
----------	-----------------------------	----------	------------	------	---------

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd.



TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd.

Part No.	TX-H1936SW17A-2860V39-02H90	Spec No.	WKF-BF0378	Page	4 of 10
----------	-----------------------------	----------	------------	------	---------

# Typical Electrical/Optical Characteristics Curves

(25 °C Ambient Temperature Unless Otherwise Noted)

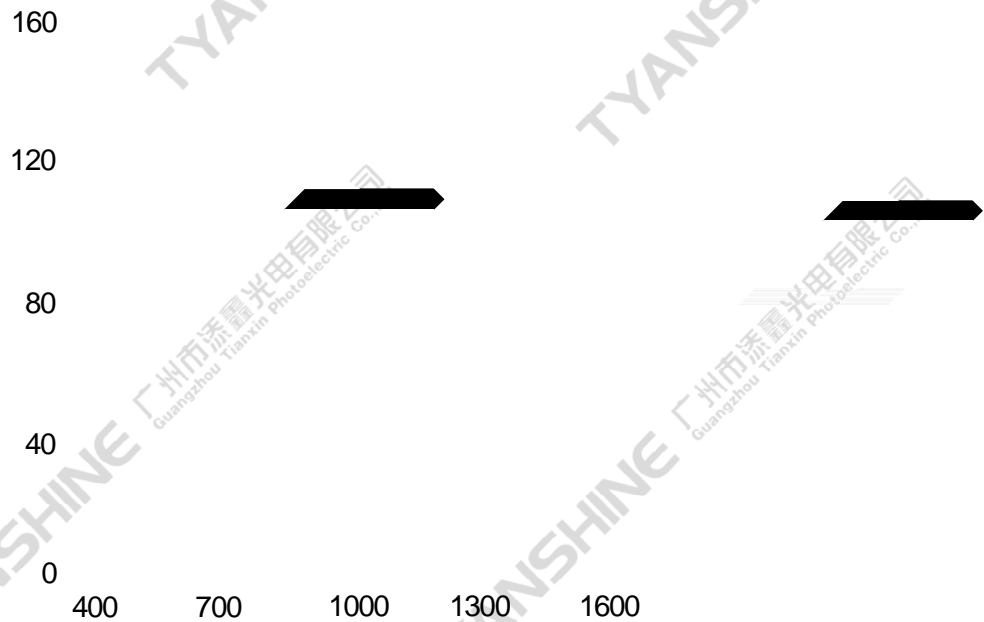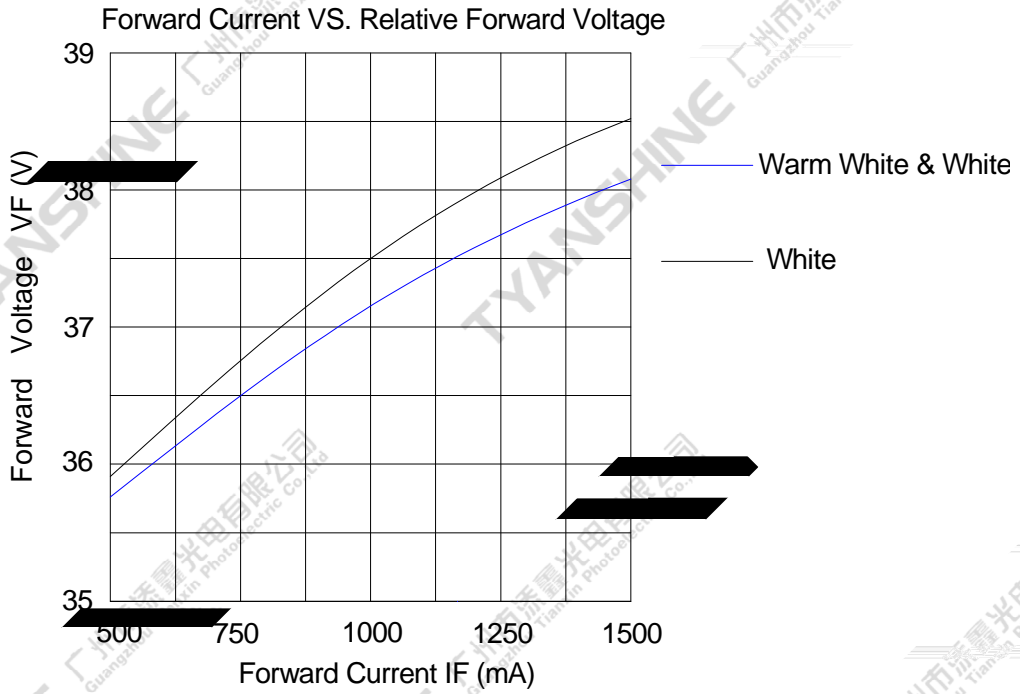

TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd



TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd



TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd




TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd





TYANSHINE 广州市添鑫光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd



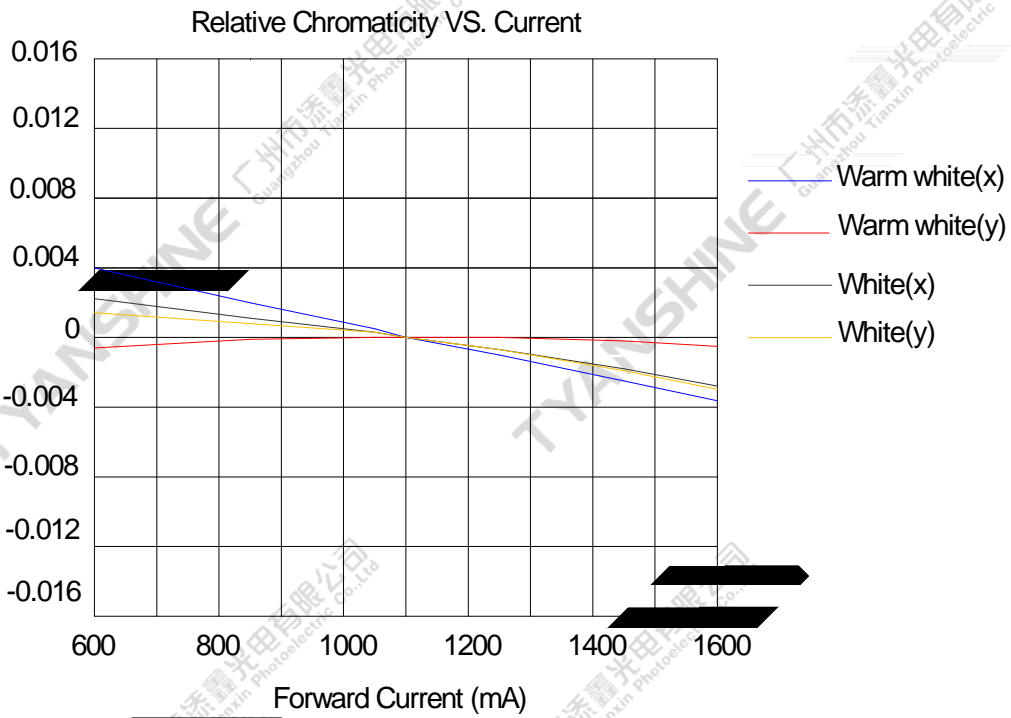

0.02  
0  
-0.02  
-0.04  
-0.06  
-0.08  
25

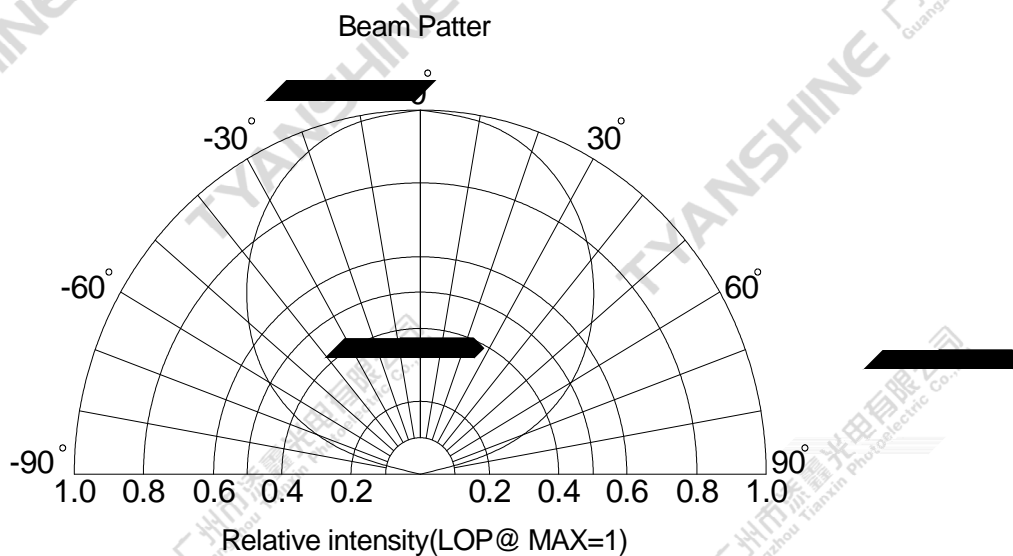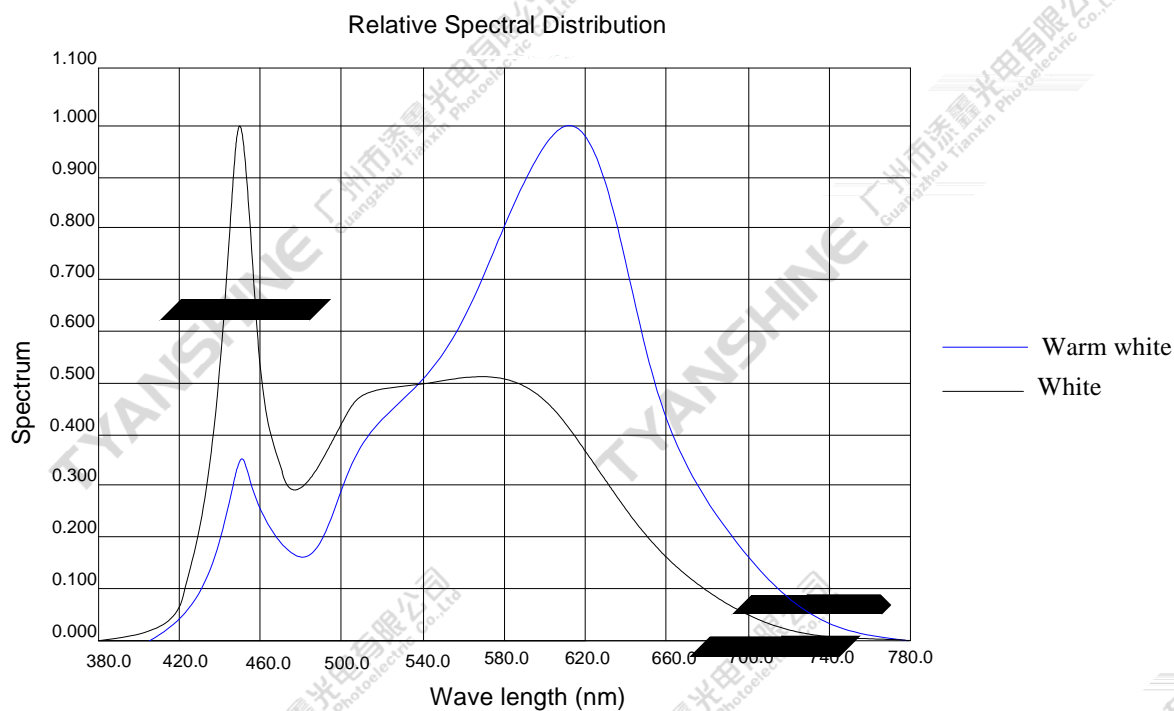

**Notes:**

1. 2 1/2 is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is ± 5°.

Part No.	TX-H1936SW17A-2860V39-02H90	Spec No.	WKF-BF0378	Page	8 of 10
----------	-----------------------------	----------	------------	------	---------



**Chromaticity Coordinates** 哎Condition IF=1000mA Tc=25" 唉

